involve audio
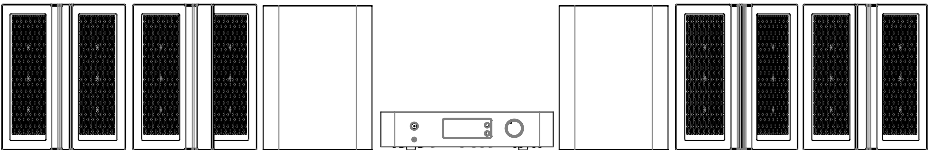## Intelligent Sound
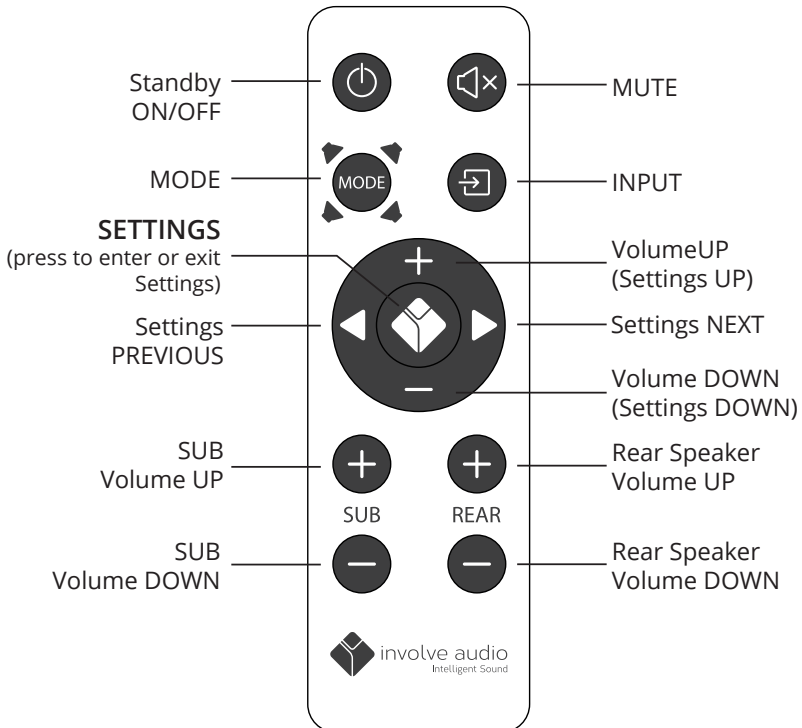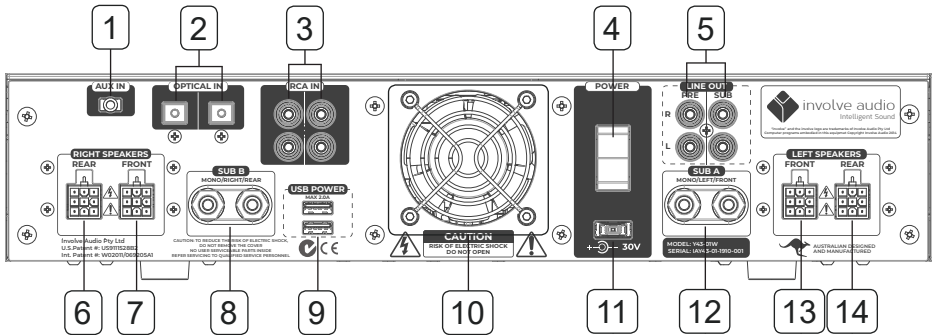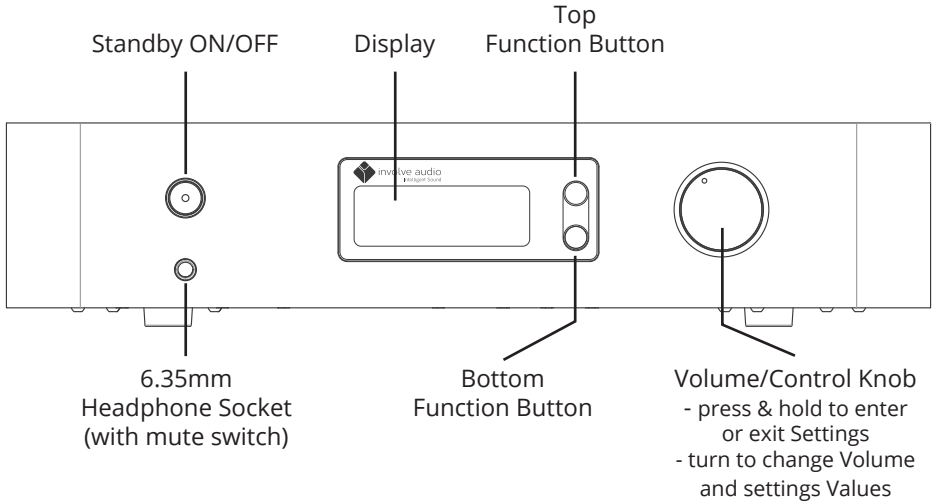
Involve Audio Y4
Quick Start Guide

Quick Start Guide

These are quick setup instructions and should help you quickly get your Y4 system setup and going, for more detail please read the full instruction manual.

1. Unpack from box
2. Assemble Y Speakers
3. Position speakers around the room
4. Connect Speakers and Devices to the Y4 Amplifier
5. Connect Power to the Y4 Amplifier
6. Turn ON the Y4 with the Power Switch on the rear fo the amplifier
7. Calculate and set SweetSpot Delay Distance to suit your room
8. Set Sub-Woofer Mode according to your setup
9. Set listening mode to SST Involve for optimum sound experience
10. Play some music and adjust Rear Speaker and Sub-Woofer levels to your preference

Standby ON/OFF — MUTE

MODE — INPUT

SETTINGS (press to enter or exit Settings) — VolumeUP (Settings UP)

Settings PREVIOUS — Settings NEXT

— Volume DOWN (Settings DOWN)

SUB Volume UP — Rear Speaker Volume UP

SUB — REAR

SUB Volume DOWN — Rear Speaker Volume DOWN

involve audio
Intelligent Sound

Involve Audio Pty Ltd

Standby ON/OFF   Display   Top Function Button

involve audio
Intelligent Sound

6.35mm Headphone Socket (with mute switch)

Bottom Function Button

Volume/Control Knob
- press & hold to enter or exit Settings
- turn to change Volume and settings Values

1   2   3   4   5

AUX IN   OPTICAL IN   RCA IN   POWER   LINE OUT   FRE   SUB

RIGHT SPEAKERS
REAR   FRONT

SUB B
MONO/RIGHT/REAR

USB POWER
MAX 2.0A

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

30V

MODEL: Y4S 01W
SERIAL: IAY4 3-01-1910-001

SUB A
MONO/LEFT/FRONT

LEFT SPEAKERS
FRONT   REAR

involve audio
Intelligent Sound

Involve Audio Pty Ltd
U.S Patent #: US9111528B2
Int. Patent #: WO2011/065205A1

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE THE COVER
NO USER SERVICEABLE PARTS INSIDE
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL

AUSTRALIAN DESIGNED
AND MANUFACTURED

6   7   8   9   10   11   12   13   14

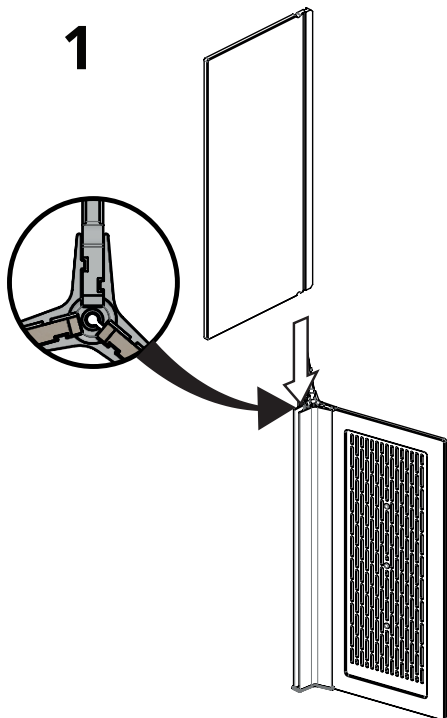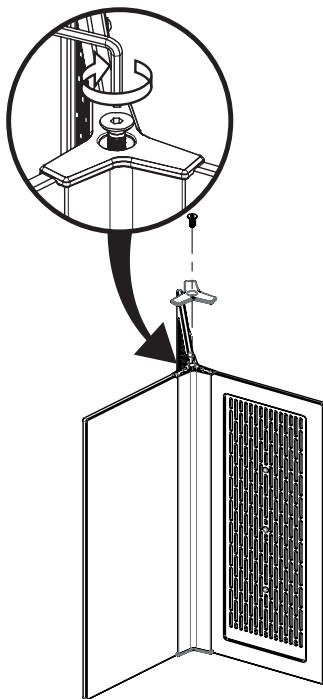|			
1	3.5mm Aux IN	8	SUB B (Mono/Right/Rear)
2	OPTICAL IN x2	9	USB 5V Power Out x2
3	RCA IN x2	10	Air Flow vents, don't cover
4	POWER SWITCH	11	30V POWER IN
5	RCA Line OUT	12	SUB A (Mono/Left/Front)
6	Y Speaker - REAR LEFT	13	Y Speaker - FRONT RIGHT
7	Y Speaker - FRONT LEFT	14	Y Speaker - REAR RIGHT

Y Speaker A - FL/RR
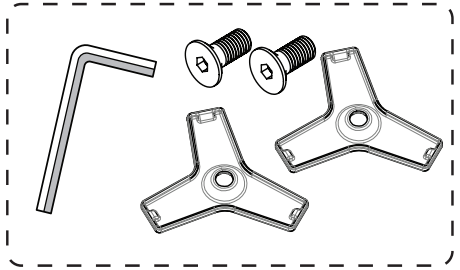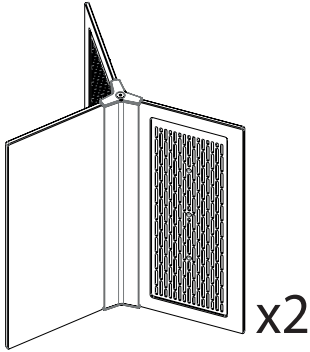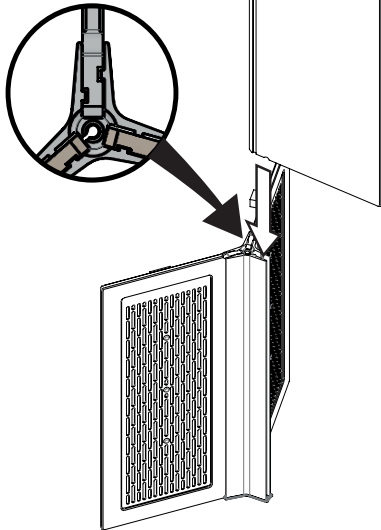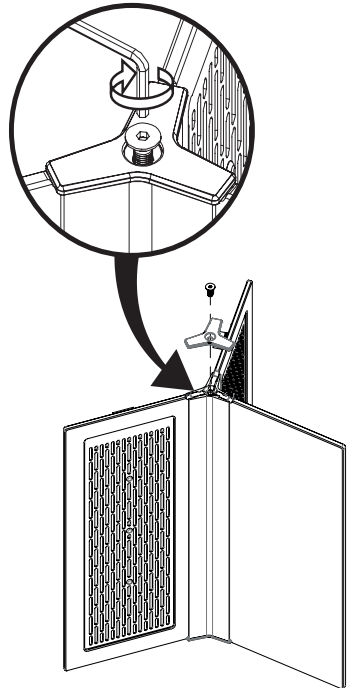## (Front Left / Rear Right)

x2

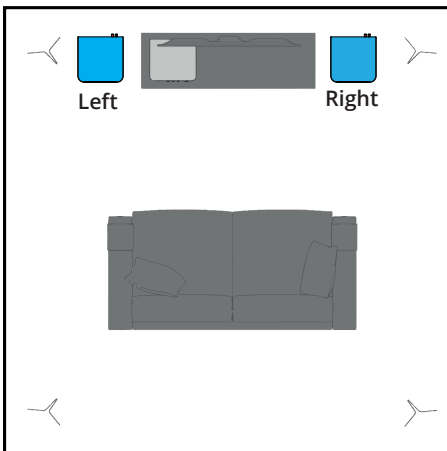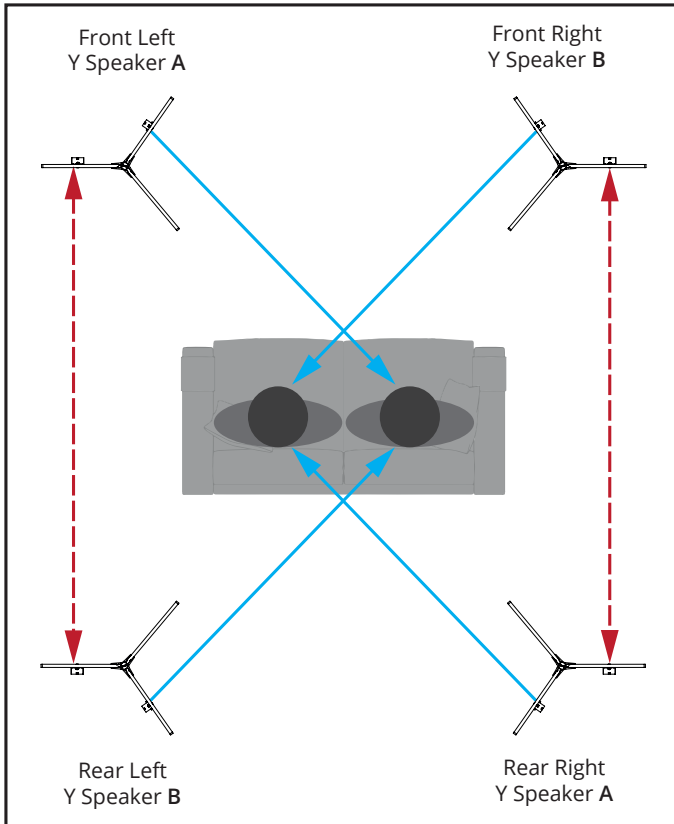involve audio
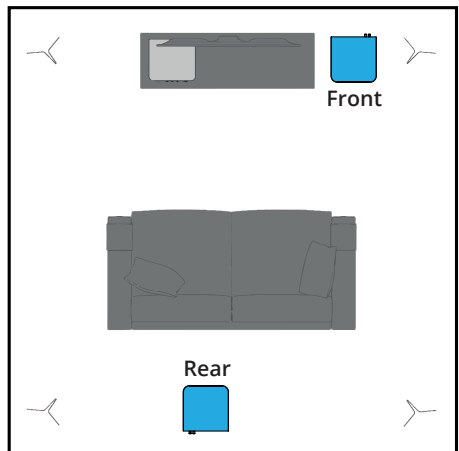intelligent sound
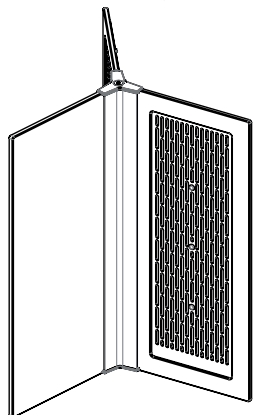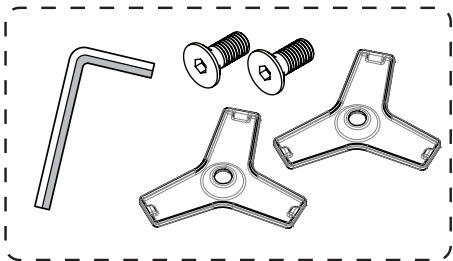
1

2

Y Speaker B – FR/RL
(Front Right / Rear Left)

x2

involve audio
intelligent sound

1

2

Speaker Positioning

Front Left
Y Speaker **A**

Front Right
Y Speaker **B**

Rear Left
Y Speaker **B**

Rear Right
Y Speaker **A**

Left

Right

Stereo Sub-Woofer

Front

Rear

Front/Rear Sub-Woofer

10-Pin   6-Pin

(FR/RL Y Speaker model shown
FL/RR connectors are mirrored)

Y Speaker connectors

FR/RL   FL/RR
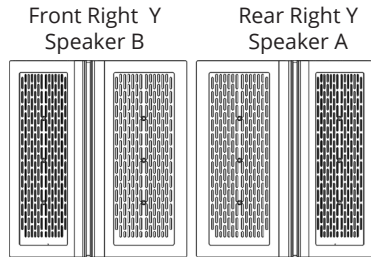Speaker B   Speaker A
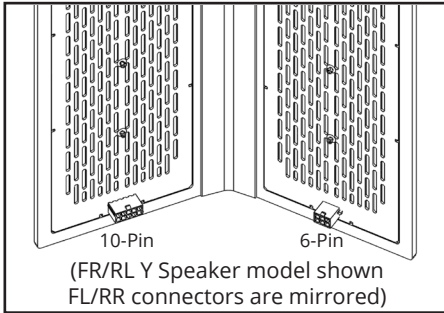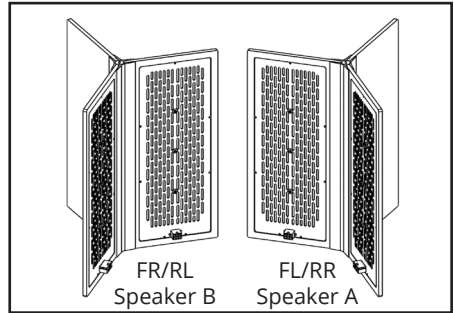
Y Speakers in upright position
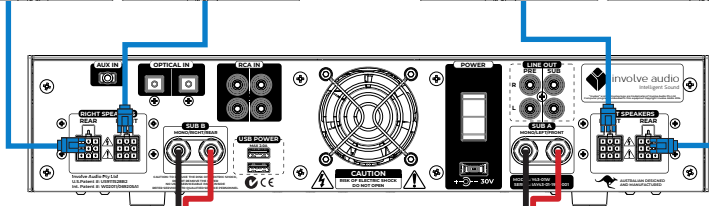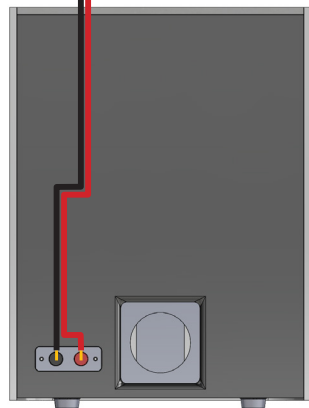
Rear Left Y   Front Left Y
Speaker B   Speaker A

Front Right Y   Rear Right Y
Speaker B   Speaker A
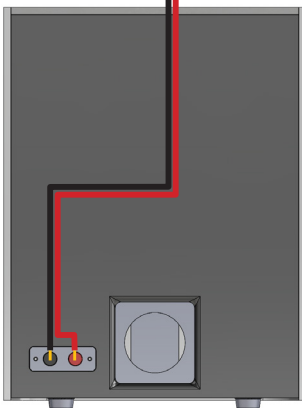
Mono/Right/Rear Sub-Woofer   Mono/Left/Front Sub-Woofer

Setting up SweetSpot™ (SST™)

Front Left Y Speaker

Front Right Y Speaker

Close Distance

Far Distance

Close Distance

Far Distance

Rear Left Y Speaker

Rear Right Y Speaker
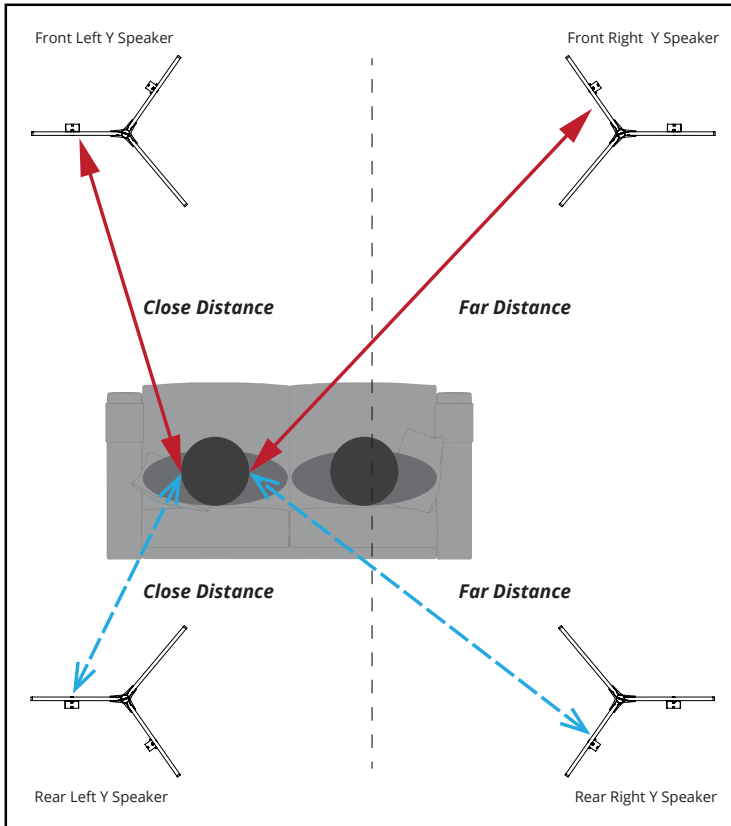
Delay Distance = Far Distance - Close Distance

Delay Distance (Metres)	Delay Distance (Feet, Inches)	SST™ REAR/FRONT Setting Value
0m	0'	0
0.4m	1' 4"	0.4
0.5m	1' 8"	0.5
0.6m	2'	0.6
0.8m	2' 8"	0.8
0.9m	3'	0.9
1.0m	3' 3"	1.0
1.2m	3' 11"	1.2
1.4m	4' 7"	1.4
1.6m	5' 3"	1.6

Involve Audio Pty Ltd